

HASSLE-FREE FLOORING

PROSOLUTIONS | PRS92
PROSOLUTIONS II | PRS96

Construction	Flex LVF
Installation	Glue Down
Thickness	2 mm
Wear Layer	6 mil (PRS92); 12 mil (PRS96)
Plank/Tile Size	6" x 48"
Sq Ft/Carton	54
Attached Underlayment	No
Bevel Type	Micro
Warranties	15 YR Limited Residential (PRS92)
.....	25 YR Limited Residential (PRS96)
.....	6 YR Limited Light Commercial (PRS96)



COLOR SHOWN: SANDBAR | 711

WATERPROOF PERFORMANCE

EASY TO MAINTAIN


EASY TO REPAIR



BRINDLE
868



SORREL
878



SANDBAR
711



CAMEL
222




PORTOBELLO
838



CARAMEL
848




LATTE
232

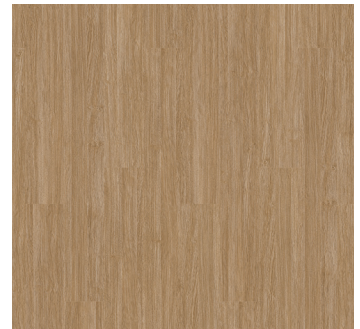

TOFFEE
258



DRIFTWOOD
167



GREY MIST
16



PEPPERCORN
124



PINE CREST
983


RIVERSIDE BARNWOOD
932

SADDLEBACK
2

AUTUMN EMBER
920

COFFEE BEAN
72

PERFORMANCE 
ACCESSORIES

ADHESIVES / SEALERS INVENTORY STYLE NAME	ADHESIVES / SEALERS DESCRIPTION	SPREAD RATE	MOLDINGS	MOLDING SKUS
MVONE	4-Gallon	250 Sq Ft/Gal	Waterproof Quarter Round	WPQR-WHITE
MVONE	1-Gallon	250 Sq Ft/Gal	Quarter Round	VQND-WHITE
M7	8-Ounce	100 LF with 1/8" Bead	Wall Base	RMBS-WHITE
XL23 PrimeCoat	4 Gallon	315-360 Sq Ft/Gal	-	-

FOR MORE INFORMATION, VISIT MOHAWKFLOORING.COM.

