




210 Twist




400 Bunch



510 Bind



700 Fold



706 Wrap




500 Pleat

Style Name	<b>SORT</b>	
Style Number	<b>54919</b>	
Product Type	<b>Carpet Tile</b>	
Dye Method	<b>Solution Dyed</b>	
Primary Backing	<b>Synthetic</b>	
Traffic Rating	<b>Moderate</b>	
	U.S.	Metric
Product Size	<b>24 in x 24 in</b>	<b>60.96 cm x 60.96 cm</b>
Area Per Carton	<b>80 ft<sup>2</sup></b>	<b>7.43 m<sup>2</sup></b>
Pieces Per Carton	<b>20</b>	
Gauge	<b>1/10 in</b>	<b>39.37 per 10 cm</b>
Stitches	<b>10 per in</b>	<b>37 per 10 cm</b>
Finished Pile Thickness	<b>0.128 in</b>	<b>3.25 mm</b>
Average Density	<b>4500 oz/yd<sup>3</sup></b>	
Total Thickness	<b>0.254 in</b>	<b>6.45 mm</b>
Tufted Weight	<b>16 oz/yd<sup>2</sup></b>	<b>542.5 g/m<sup>2</sup></b>



### Recommended Installation Methods

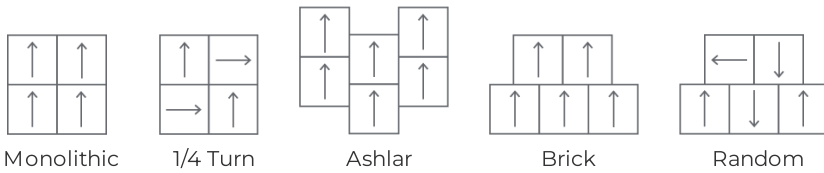

### Performance Testing

Pill Test	<b>Pass</b>
Radiant Panel	<b>Class I</b>
NBS Smoke	<b>Less than 450</b>
Electrostatic Propensity	<b>Less than 3.5 kv</b>
CRI Greenlabel Plus	<b>GLP8233</b>
ADA Compliance	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

### Warranties

**Carpet Tile 15 year Commercial Limited Warranty with Stain and Color for StrataWorx**

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.