


The product rendered in this room scene may not be an exact representation of actual flooring.



88200 Make It Work




88300 Hold The Line




88301 Stay Positive




88302 Do The Work




88400 Get Involved




88401 Advocate




88402 Finish The Task




88501 Get Along




88502 Prescribe



88503 Stay Active

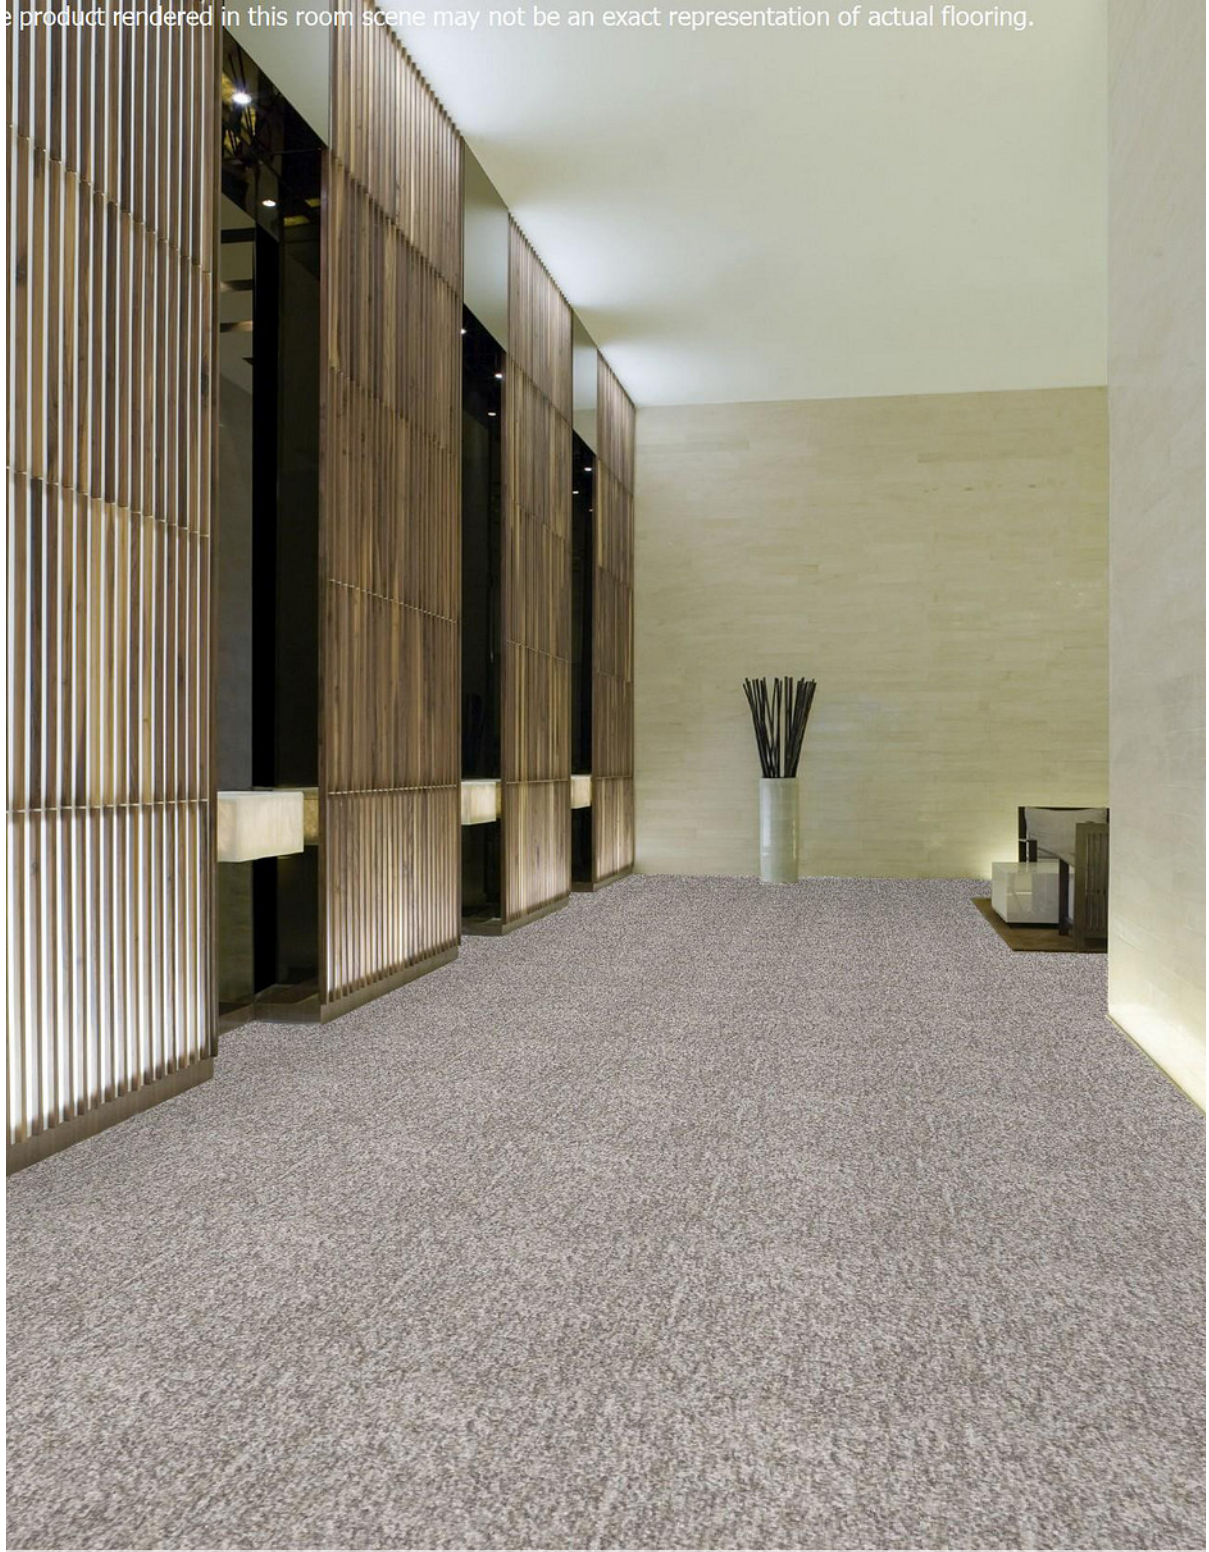

88101 Have Faith




88600 Counsel




88702 Encourage



88703 Plan Ahead




88800 Exercise



88801 Practice

Style Name	SOUND ADVICE TILE	
Style Number	54488	
Product Type	Carpet Tile	
Fiber	100% Eco Solution Q100™ Nylon	
Dye Method	SOLUTION DYED	
Primary Backing	Synthetic	
Traffic Rating	Severe	
Protective Treatments	SSP Protective Treatments	
	U.S.	Metric
Product Size	24 in x 24 in	6096 cm x 6096 cm
Area Per Carton	48 ft <sup>2</sup>	4.46 m <sup>2</sup>
Pieces Per Carton	12	
Gauge	1/10 in	39.37 per 10 cm
Stitches	9 per in	35 per 10 cm
Finished Pile Thickness	0.121 in	3.07 mm
Average Density	6545 oz/yd <sup>3</sup>	
Total Thickness	0.266 in	6.76 mm
Tufted Weight	22 oz/yd <sup>2</sup>	745.9 g/m <sup>2</sup>

## Recommended Installation Methods



Monolithic

## Performance Testing

Pill Test	<b>Pass</b>
Radiant Panel	<b>Class I</b>
NBS Smoke	<b>Less than 450</b>
Electrostatic Propensity	<b>Less than 3.5 kv</b>
CRI Greenlabel Plus	<b>GLP9968</b>
ADA Compliance	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

**Carpet Tile Lifetime Commercial Limited Warranty with Stain and Color**

Specifications are subject to nominal manufacturing variance.  
Material supply and/or manufacturing processes may necessitate changes without notice.